


TECHNICAL DATA

Voltage	12.00 V
Performance	12Ah C20 to 1.75V/cell at 25°C
Float Voltage	2.27V/cell at 20°C
Connection torque	na
Max Charge Current	3.00 A
Weight (Typical)	3.9 KG

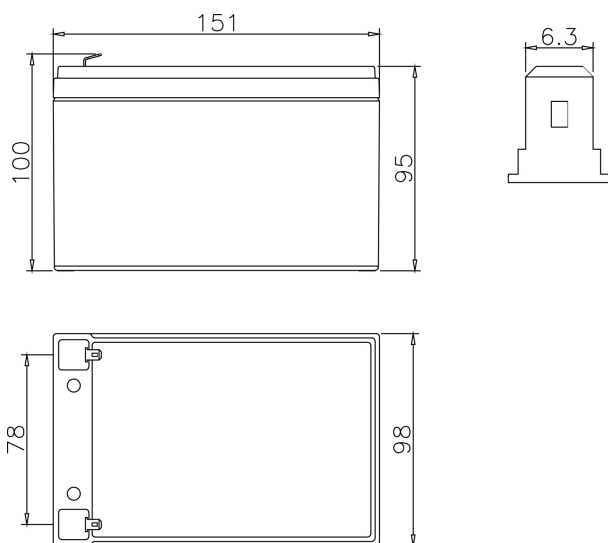

ELECTRICAL PERFORMANCES - Including Fiamm connection voltage drop

Constant Current Discharge Table [A] at 20°C

V / cell	5 min	10 min	15 min	30 min	45 min	1 h	2 h	3 h	4 h	5 h	6 h	8 h	10 h
1,60	52,6	34,3	25,3	14,4	10,2	7,77	4,38	3,08		2,02			1,10
1,65	51,7	33,9	25,1	14,3	10,1	7,76	4,34	3,06		2,00			1,08
1,67	50,8	33,4	24,9	14,3	10,1	7,74	4,32	3,04		1,99			1,07
1,70	49,7	32,9	24,6	14,2	9,99	7,73	4,28	3,02		1,98			1,06
1,75	47,9	32,0	24,0	14,1	9,89	7,69	4,25	2,99		1,95			1,05
1,80	45,6	30,7	23,1	13,9	9,80	7,65	4,18	2,92		1,89			1,04
1,85	43,4	29,5	22,3	13,7	9,71	7,53	4,11	2,86		1,81			1,03
1,90													

Constant Power Discharge Table [W/cell] at 25°C

V / cell	5 min	10 min	15 min	30 min	45 min	1 h	2 h	3 h	4 h	5 h	6 h	8 h	10 h
1,60	105	68,6	50,6	28,8	20,6	15,9	8,48	6,01		4,00			2,17
1,65	103	67,7	50,2	28,7	20,5	15,8	8,44	5,99		3,99			2,15
1,67	101	66,9	49,8	28,6	20,5	15,8	8,40	5,97		3,98			2,13
1,70	99,1	65,6	49,3	28,5	20,3	15,7	8,38	5,93		3,96			2,13
1,75	95,2	63,5	48,2	28,2	20,1	15,6	8,32	5,84		3,92			2,12
1,80	91,0	61,1	46,7	27,8	20,0	15,4	8,23	5,72		3,73			2,10
1,85	86,8	59,0	45,1	27,5	19,8	15,2	8,06	5,52		3,51			2,10
1,90													