


Valve Regulated Lead Acid Battery

Yuvolt Y0.8-12

SPECIFICATIONS		
Nominal voltage	12	V
20-hr rate Capacity to 1.75VPC at 20°C	0,80	Ah
10-hr rate Capacity to 1.75VPC at 20°C	0,74	Ah
DIMENSIONS		
Length	96 (±1)	mm
Width	25 (±1)	mm
Height	62 (±1)	mm
(height over terminals)	62 (±1)	mm
Mass (typical)	0,33	kg
TERMINAL TYPE		
PLUG - JST No VHR-2N		
OPERATING TEMPERATURE RANGE		
Storage	-20°C to +60°C	
Charge	-15°C to +50°C	
Discharge	-20°C to +60°C	
STORAGE		
Capacity loss per month at 20°C (approx)	3	%
CASE MATERIAL		
Standard Option	ABS	
CHARGE VOLTAGE		
Float charge voltage at 20°C	13,65 (±1%)	V
	2,275 (±1%)	V/cell
Float Charge voltage temperature correction factor (for variations from the standard 20°C)	-3	mV/cell/°C
Cyclic (or Boost) charge at 20°C	14,5 (±3%)	V
	2,42 (±3%)	V/cell
Cyclic Charge voltage temperature correction factor (for variations from the standard 20°C)	-4	mV/cell/°C
CHARGE CURRENT		
Float charge current limit	No limit	A
Cyclic (or Boost) charge current limit	0,24	A
MAXIMUM DISCHARGE CURRENT		
5 sec.	5	A
SHORT-CIRCUIT CURRENT & INTERNAL RESISTANCE (according to EN IEC 60896-21)		
Internal resistance	200	mΩ
Short-Circuit current	N/A	A
IMPEDANCE		
Measured at 1 kHz	N/A	mΩ
DESIGN LIFE		
EUROBAT Classification: Standard Commercial	3 to 5	years
Yuasa design life @ 20°C	up to 5	years
SAFETY		
Installation		
Can be installed and operated in any orientation except permanently inverted		
Vent valves		
Each cell is fitted with a low pressure release valve to allow gasses to escape and then reseal.		
Gas Release		
VRLA Batteries release hydrogen gas which can form explosive mixtures in air. Do not place inside a sealed container.		
Recycling		
YUASA VRLA batteries must be recycled at the end of life in accordance with local and national laws and regulations.		



LAYOUT

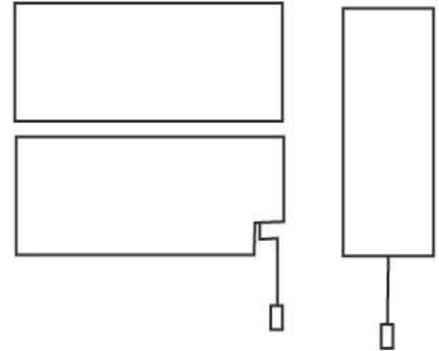

3RD PARTY CERTIFICATIONS

ISO 9001 - Quality Management Systems
 ISO 14001 - Environmental Management Systems
 ISO 45001 - Health and Safety Management Systems



STANDARDS

IEC61056

ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE

Issue No.: V.1 / Issue Date: May 2023

GS YUASA BATTERY Germany GmbH
 Europark Fichtenhain B 17
 D-47807 Krefeld
 Germany

